

Specification sheet

FA CF65

RH



ENGINES
CF65 220
CF65 220
CF65 250
CF65 250
CF65 300

GVM ¹⁾	GCM ²⁾
18000 kg	22500 kg
Max. front 8000 kg	
Max. rear 10000 kg	

072F6506IAAA - 201949c - 29-08-2019

Belarus, TurbotrucksBel JLLC, www.turbotrucks.by

CAB EXTERIOR

Mechanically suspended Day Cab with steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2300 mm.; Electrically adjustable mirrors; Front view mirror.

Optional

02106 Sleeper Cab	07313 Combi lights led in bumper
01137 Space Cab	
08071 Xenon head lights with washer	06592 Four spot lights on the cab roof
00396 Permanent driving lights	06593 Skylights
06166 Combi lights in bumper	06591 Two spot lights on the cab roof

AERODYNAMICS

Optional

04906 Side collars

COLOURS

Cab colour H3279 Brilliant White; Head lamp panel, bumper and step cover: grey; Chassis colour grey..

Optional

09932 Head lamp panel, bumper and step cover: Br White	04198 Mirror covers in cab colour
09931 Head lamp panel, bumper and step cover: cab colour	16153 Cab and chassis colours

CAB INTERIOR

Driver seat: Comfort Air; Co-driver seat: basic; Storage box on engine tunnel; No air conditioning; Roof hatch glass, manual control.

Optional

09271 Steering wheel, leather, colour black	09150 Lower bunk, raised 135 mm
06111 Dashboard: wood structure	09151 Lower bunk, raised 250 mm
02117 Third seat	04186 Upper bunk
06539 Refrigerator	06599 Auxiliary cab heater (air)
04346 Lower bunk, normal level	

COMMUNICATION AND DRIVING MANAGEMENT

FMS connector prepared; Tachograph digital, VDO; Cruise control.

Optional

09681 Preparation for Maut	09721 Handsfree telephone kit
16155 Audio equipment, makes and types	

SAFETY AND SECURITY

Basic engine immobiliser system.

Optional

09992 Lane Departure Warning System	01725 Reverse warning
--	------------------------------

SUSPENSION AND AXLES

Front: 7.50 t, parabolic, 152N; Rear: 11.50 t, air suspension, SR1132.

Optional

01800 Rear axle SR1344	01603 Rear springs parabolic
01778 Rear axle load 13.00 t	03345 Rear springs parabolic, short

WHEELS AND TYRES

Front axle 1: 315/70R22.5; Rear axle 1: 315/70R22.5; Spare: 315/70R22.5; Disc wheels steel, silvergrey; Wheel protection rings silvergrey.

Optional

16152 Tyre makes and types

DRIVELINE

GR165, 165 kW/224 hp, 38C. Cab badge: 220; Exhaust emission Euro 5; Manual gearbox, 6 speeds; Gearbox ratio 6.58-0.78; Rear axle ratio 5.13.

Optional

01553 Engine idle shutdown, 5 minutes	02313 Gearbox direct drive
04393 Manual gearbox, 9 speeds	02843 Mechanical differential lock
08834 AS Tronic gearbox, 6 speeds	03721 ASR
09888 Automatic gearbox, 5 speeds	

BRAKE SYSTEM

ABS.

CHASSIS

Wheelbase 4.00 m / rear overhang 1.70 m; Side member height 260 mm; Plastic fuel tank 200 l; Fuel tank plastic; Spray suppression; Front underrun protection (FUP); Spare wheel carrier side.

DRAWBAR AND TRAILER EQUIPMENT

Closing member.

Optional

03048 D-value cross member D= 7.5	01948 D-value cross member D=10
--	--

BODIES AND PREPARATIONS FOR BODYING

Application connector on the cab front.

Optional

06692 Application connector on the chassis	02597 Application connector for tail lift control
---	--

POWER TAKE-OFF (PTO)

Optional

16148 PTO types and positions

ELECTRICAL POWER SUPPLY

Alternator 80 A, batteries 2x 125 Ah..

Optional

01897 Alternator 100 A	08797 Batteries 2x175Ah
-------------------------------	--------------------------------

GVM AND GCM

Chassis weight related technical GVM max 19000 kg; Driveline related max GCM 22500 kg.

Optional

00054 Driveline related max GCM 18000 kg	02658 Driveline related max GCM 26000 kg
00043 Driveline related max GCM 19000 kg	00620 Driveline related max GCM 28000 kg
00711 Driveline related max GCM 21500 kg	03027 Driveline related max GCM 32000 kg class 3

APPLICATION CONDITIONS

Moisture separator, unheated; Air intake on the cab roof.

Optional

02270 Cold climate	09961 Cyclonic air intake behind the cab
---------------------------	--

SERVICE AND MAINTENANCE



Standard Warranty takes care of 1 year complete vehicle, 2nd year driveline and 1st year breakdown.; ITS service.



Go to **DAF.com** to configure your own perfect DAF.

FA CF65

RH

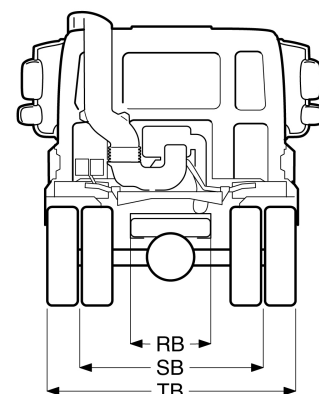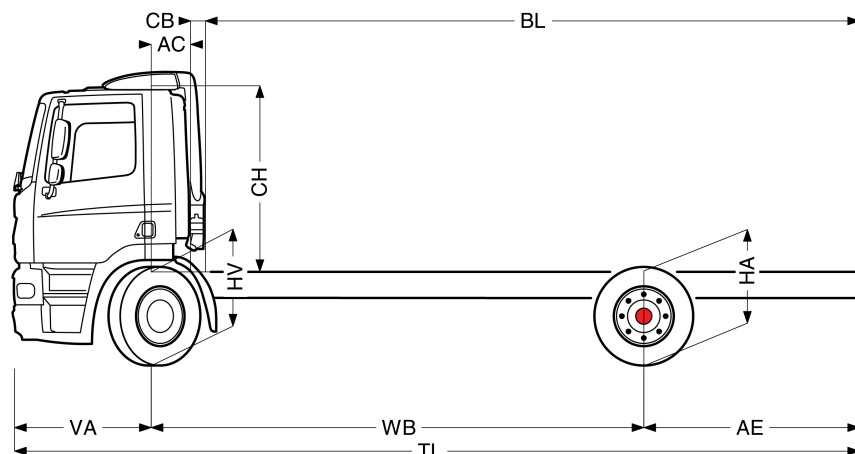

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ²⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
SPACE CAB	4.00	1.70	3900	1610	5511	4100	8390	12489	0.82	0.15	2.53	3.46	3.46	7.08	1.07	1.02	14.52	16.03
	4.15	1.85	3903	1623	5526	4097	8377	12474	0.82	0.15	2.53	3.66	3.66	7.38	1.07	1.02	14.93	16.45
	4.45	2.00	3922	1649	5570	4078	8351	12430	0.82	0.15	2.53	4.06	4.06	7.83	1.07	1.02	15.75	17.28
	4.75	2.00	3938	1653	5591	4062	8347	12409	0.82	0.15	2.53	4.48	4.48	8.13	1.07	1.02	16.57	18.11
	4.90	2.15	3941	1667	5608	4059	8333	12392	0.82	0.15	2.53	4.68	4.68	8.43	1.07	1.02	16.98	18.53
	5.10	2.75	3937	1728	5664	4063	8272	12336	0.82	0.15	2.53	4.93	4.93	9.23	1.07	1.02	17.53	19.08
	5.40	2.95	3944	1747	5691	4056	8253	12309	0.82	0.15	2.53	5.33	5.33	9.73	1.07	1.02	18.36	19.91
	5.70	3.15	3966	1793	5759	4034	8207	12241	0.82	0.15	2.53	5.73	5.73	10.23	1.07	1.02	19.18	20.75
	6.10	2.80	3994	1758	5752	4006	8242	12248	0.82	0.15	2.53	6.30	6.30	10.28	1.07	1.02	20.28	21.86
	6.60	3.20	4017	1817	5834	3983	8183	12166	0.82	0.15	2.53	6.96	6.96	11.18	1.07	1.02	21.66	23.24
DAY CAB	6.90	3.70	4017	1875	5892	3983	8125	12108	0.82	0.15	2.53	7.35	7.35	11.98	1.07	1.02	22.49	24.08
	7.30	3.30	4054	1851	5905	3946	8149	12095	0.82	0.15	2.53	7.92	7.92	11.98	1.07	1.03	23.60	25.19
	4.00	1.70	3718	1613	5331	4282	8387	12669	0.39	0.18	1.86	4.18	4.18	7.08	1.07	1.03	14.52	16.03
	4.15	1.85	3721	1626	5346	4279	8374	12654	0.39	0.18	1.86	4.38	4.38	7.38	1.07	1.02	14.93	16.45
	4.45	2.00	3740	1651	5391	4260	8349	12609	0.39	0.18	1.86	4.78	4.78	7.83	1.07	1.02	15.75	17.28
	4.75	2.00	3756	1655	5411	4244	8345	12589	0.39	0.18	1.86	5.18	5.18	8.13	1.07	1.03	16.57	18.11
	4.90	2.15	3759	1670	5428	4241	8330	12572	0.39	0.18	1.86	5.38	5.38	8.43	1.07	1.03	16.98	18.53
	5.10	2.75	3754	1731	5485	4246	8269	12515	0.39	0.18	1.86	5.63	5.63	9.23	1.07	1.02	17.53	19.08
	5.40	2.95	3762	1750	5512	4238	8250	12488	0.39	0.18	1.86	6.02	6.02	9.73	1.07	1.02	18.36	19.91
	5.70	3.15	3783	1796	5579	4217	8204	12421	0.39	0.18	1.86	6.42	6.42	10.23	1.07	1.02	19.18	20.75
SLEEPER CAB	6.10	2.80	3812	1761	5573	4188	8239	12427	0.39	0.18	1.86	6.97	6.97	10.28	1.07	1.03	20.28	21.86
	6.60	3.20	3834	1820	5654	4166	8180	12346	0.39	0.18	1.86	7.63	7.63	11.18	1.07	1.03	21.66	23.24
	6.90	3.70	3834	1878	5712	4166	8122	12288	0.39	0.18	1.86	8.01	8.01	11.98	1.07	1.02	22.49	24.08
	7.30	3.30	3871	1854	5725	4129	8146	12275	0.39	0.18	1.86	8.58	8.58	11.98	1.07	1.03	23.60	25.19
	4.00	1.70	3799	1611	5410	4201	8389	12590	0.82	0.16	1.86	3.40	3.40	7.08	1.07	1.02	14.52	15.90
	4.15	1.85	3801	1624	5425	4199	8376	12575	0.82	0.16	1.86	3.59	3.59	7.38	1.07	1.02	14.93	16.31
	4.45	2.00	3820	1649	5469	4180	8351	12531	0.82	0.16	1.86	4.00	4.00	7.83	1.07	1.02	15.75	17.14
	4.75	2.00	3837	1653	5490	4163	8347	12510	0.82	0.16	1.86	4.40	4.40	8.13	1.07	1.02	16.57	17.98
	4.90	2.15	3840	1667	5507	4160	8333	12493	0.82	0.16	1.86	4.60	4.60	8.43	1.07	1.02	16.98	18.39
	5.10	2.75	3835	1728	5563	4165	8272	12437	0.82	0.16	1.86	4.85	4.85	9.23	1.07	1.02	17.53	18.95
SLEEPER CAB	5.40	2.95	3843	1747	5590	4157	8253	12410	0.82	0.16	1.86	5.25	5.25	9.73	1.07	1.02	18.36	19.78
	5.70	3.15	3865	1793	5658	4135	8207	12342	0.82	0.16	1.86	5.65	5.65	10.23	1.07	1.02	19.18	20.61
	6.10	2.80	3893	1758	5651	4107	8242	12349	0.82	0.16	1.86	6.21	6.21	10.28	1.07	1.02	20.28	21.72
	6.60	3.20	3916	1817	5733	4084	8183	12267	0.82	0.16	1.86	6.87	6.87	11.18	1.07	1.02	21.66	23.11
	6.90	3.70	3916	1875	5791	4084	8125	12209	0.82	0.16	1.86	7.25	7.25	11.98	1.07	1.02	22.49	23.95
	7.30	3.30	3953	1851	5804	4047	8149	12196	0.82	0.16	1.86	7.82	7.82	11.98	1.07	1.03	23.60	25.06

OTHER DIMENSIONS VA: 1.38 HV¹³⁾: 0.97 HV¹⁴⁾: 0.96 RB: 0.79 SB: 1.83 TB: 2.49

- 1) GVM in conformity with registration documents.
- 2) GCM in conformity with registration documents.
- 3) Axle load with standard tyre size.
- 4) Chassis and cab weight calculated with: Standard specification items only with 200 litres of fuel, 26 litres of AdBlue and driver of 80 kg, tolerance $\pm 3\%$. Changing of the specification can have major impact on vehicle weight.
- 5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
- 6) CB is based on standard air intake and/or exhaust.
- 7) Cab height is measured from frame member to closed cabin roof hatch. With air intake on cab roof: +0.14 m.

- 8) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
- 9) Unladen height at centre of driven axle(s).
- 10) Laden height at centre of driven axle(s).
- 11) TK = turning circle between kerbs.
- 12) TW = turning circle between walls.
- 13) Unladen height at centre of front axle(s).
- 14) Laden height at centre of front axle(s).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.